


Performance Test

Extended Coverage Ionizing Blower Model XC2


| | |
|----------------------------|--------------------------------------------------------|
| Product: | AeroStat XC2 |
| Performance Test | Per ANSI/ESD STM 3.1-2015 |
| Conditions | |
| Test equipment: | Simco-Ion Charge Plate Monitor Model 280A (S/N: 66176) |
| Test environment: | 24°C, 52% RH |
| Test unit at 3 fan speeds: | High Medium Low |



Offset voltages for all test locations are within $\pm 10V$

Performance test locations shown below:

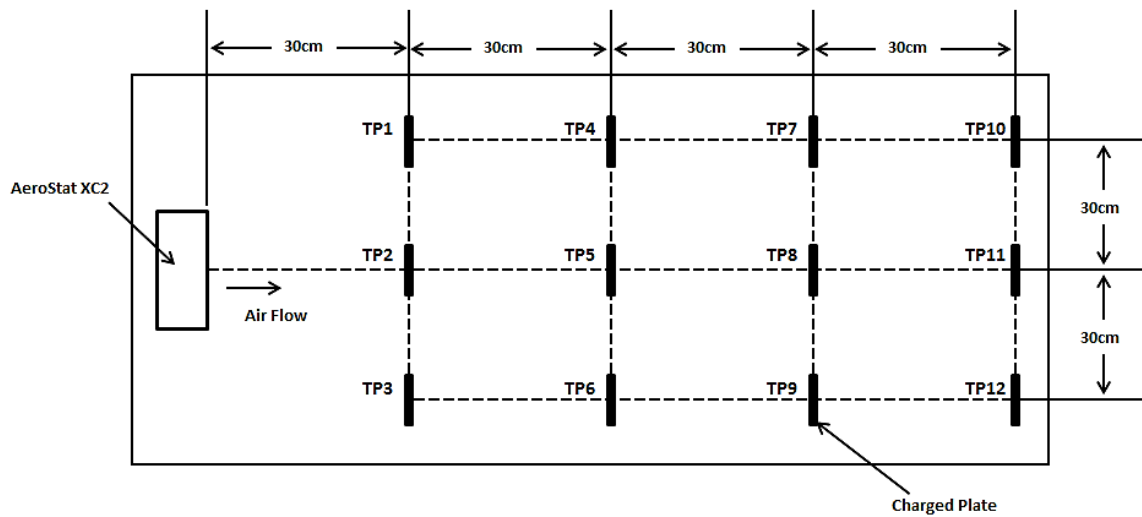

Discharge time (sec) figures at each fan speed shown below:

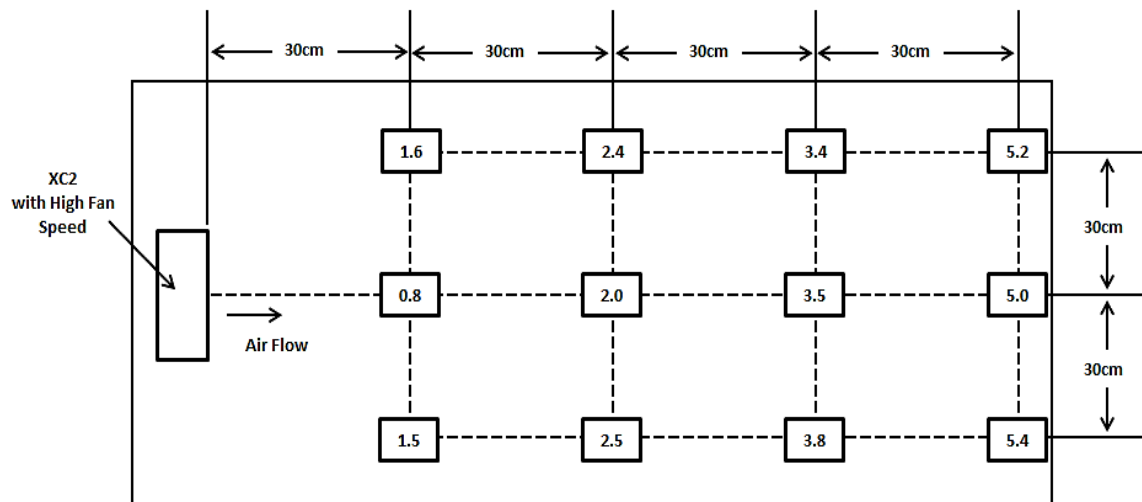

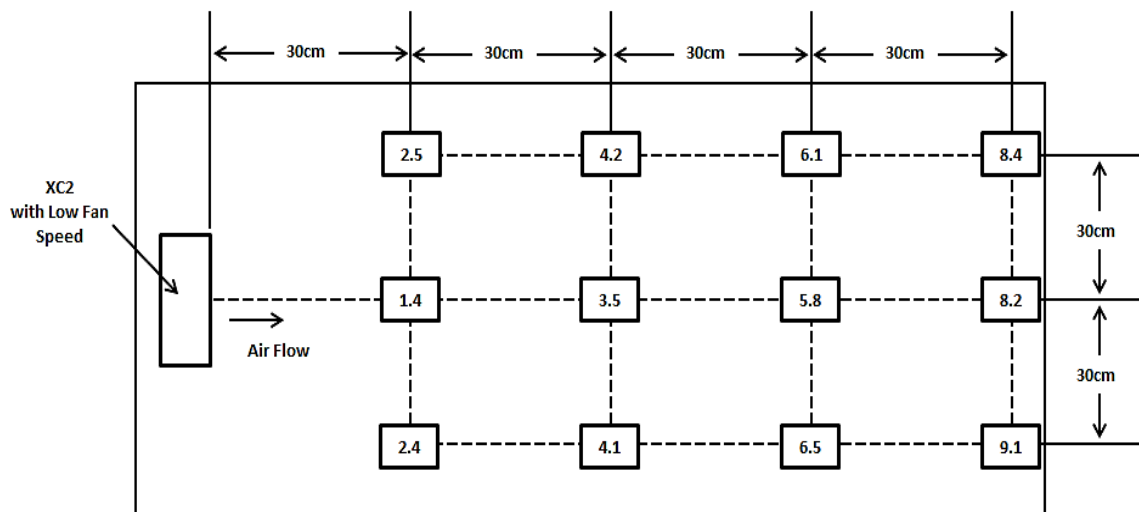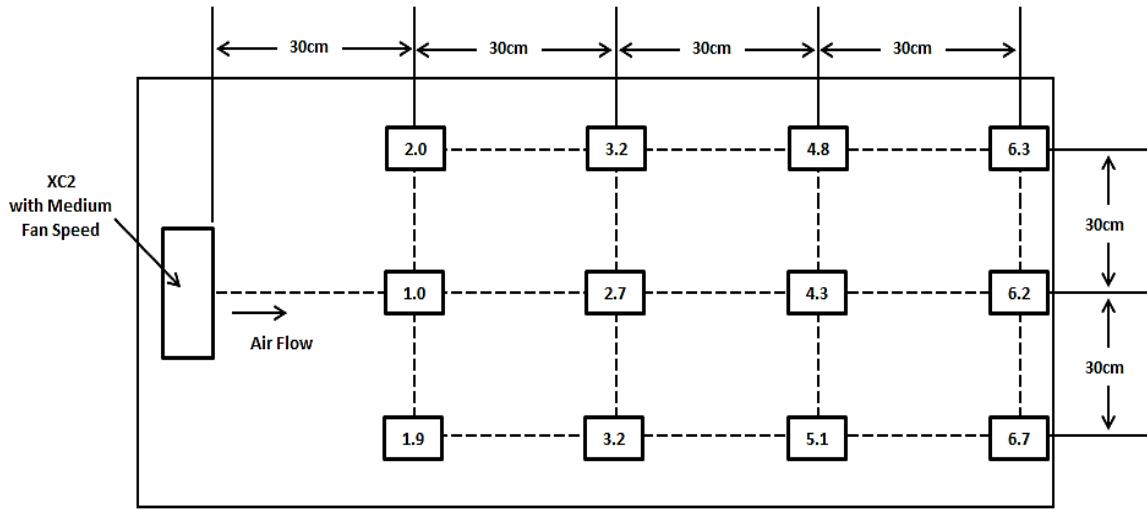

If you have any questions or need assistance, please contact Customer Service.